

SMD HIGH CURRENT INDUCTORS




MODEL NO. : SSC-10630N2 HF SERIES

FEATURES:

- * LOW CORE LOSS, HIGH EFFICIENCY PERFORMANCE, HIGH MAGNETIC CHARACTERISTICS.
- * CLOSED MAGNETIC FIELD CONSTRUCTION FOR HIGH DENSITY BOARD ASSEMBLY .
- * RIBBON WIRE STRUCTURE.
- * CUSTOM DESIGNS AVAILABLE.
- * COMPLIANT WITH RoHS AND HALOGEN FREE.

APPLICATION :

- * NOTEBOOK COMPUTERS. * VGA CARD.
- * DC/DC CONVERTER IN POWER REGULATION SYSTEM.

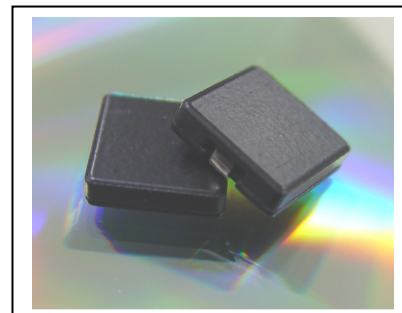

ELECTRICAL SPECIFICATION:

PART NO	INDUCTANCE (μ H) $\pm 20\%$ @0ADC	INDUCTANCE (μ H) TYP	TEMPERATURE RISE CURRENT (ADC)	INDUCTANCE (μ H)Typ	SATURATION CURRENT (ADC) (NOTE 3)	DCR $\pm 10\%$ (m Ω)
SSC-10630N2-R20 HF	0.20 $\pm 30\%$	0.185	26.0	0.18	28.0	0.79
SSC-10630N2-R35 HF	0.35 $\pm 30\%$	0.32	17.0	0.30	20.0	2.20
SSC-10630N2-R56 HF	0.56	0.45	19.0	0.44	20.0	2.20
SSC-10630N2-R68 HF	0.68	0.57	12.5	0.54	14.5	5.10
SSC-10630N2-1R0 HF	1.00	0.85	12.5	0.80	14.5	5.10
SSC-10630N2-1R2 HF	1.20	0.90	11.0	0.92	10.0	6.70
SSC-10630N2-1R6 HF	1.65	1.38	11.0	1.32	13.0	6.70
SSC-10630N2-2R2 HF	2.20	2.00	8.00	1.85	10.5	11.5


NOTE(1): Test frequency: 100 KHZ, 1Vrms.

NOTE(2): $\Delta T = 40^\circ\text{C}$ approximately under the temperature rise current.

NOTE(3): The saturation current indicates the value of DC current is approximately 20% lower than its initial value of inductance.

NOTE(4): Operating temperature range: $-40^\circ\text{C} \sim +150^\circ\text{C}$

PHYSICAL DIMENSION : (UNIT:mm)

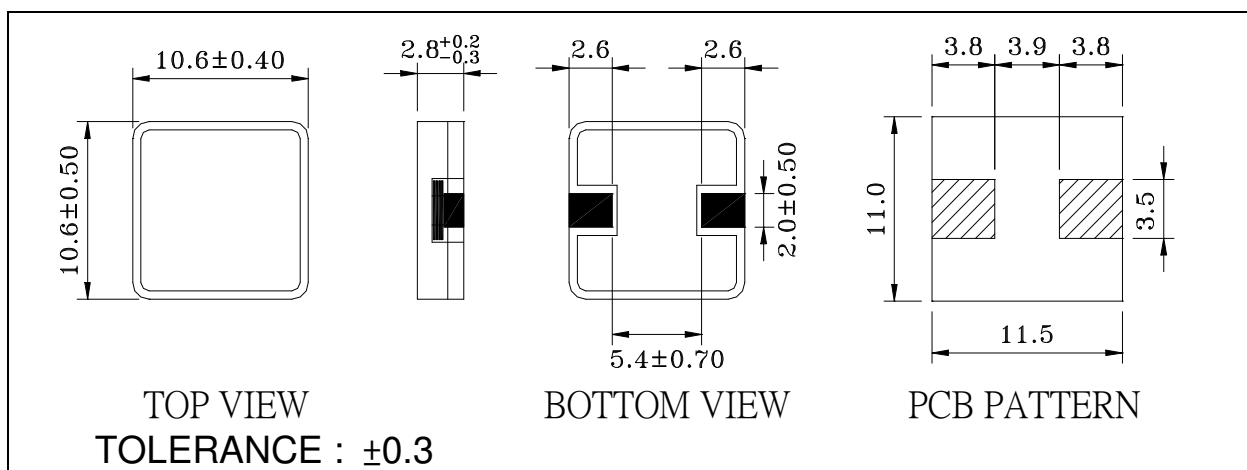

PACKAGING SPEC:

1. REEL SIZE & UNITS PER REEL : 13", 800PCS.
2. TAPE WIDTH: 24mm.
3. REEL WIDTH: 29.5mm.
4. COMPONENT PITCH: 16mm