


L series


FEATURES

- Available in vertical or horizontal w/o base
- PFC chokes
- SMPS averaging filter
- In use of metal alloy powder cores
- Without thermal aging problem
- Can be used as differential mode inductors in EMC filters

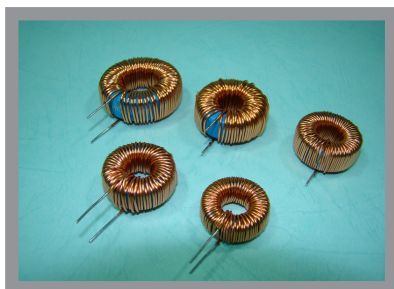

APPLICATIONS

- PFC chokes, output chokes and DM chokes for power supply units

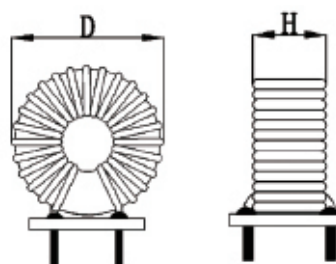

Electrical Specifications @ 25°C—Operating Temperature -30°C to 130°C

Type	Inductance (μH)	Rated current (A)※	DCR (mΩ)	Wire size (mm)	Dimension	
					L(mm)	W(mm)
LSLTR-080	220	2	97	0.7	25	12
LSLTR-090	380	3	104	0.8	28	16
LSLTR-093	540	2	158	0.7	28	15
LSLTR-106	480	4	88	0.9	32	18
LSLTR-130	420	4	88	0.9	38	17

